

# VF-LOGIXB-SAF

## 5 MP IP IR Motorized Bullet Camera

LOGIX VF-LOGIXB-SAF Bullet Camera features a cutting-edge surveillance solution designed to elevate your security monitoring to new heights. With its compact and robust design, this camera offers a versatile and reliable option for a wide range of surveillance applications.



## FEATURES AND BENEFITS



**Up to 2882x1620  
@30fps**



**IR Distance Up  
to 50 Mts**



**Metal**



**Slot up to  
256GB**



**Motorized  
Lens 2.8-12mm**



**H.265+/H.265/H.264  
Video Compressions**



**IP67**



**Min. illumination Color  
0.004lux @ F1.6**

## SPECIFICATIONS

VIDEO	
Imaging Device	1/2.7"
Effective Pixels	5MP 2880(H) x 1620(v)
Scanning System	Progressive CMOS
Min. Illumination	Color 0.004lux @ F1.6(AGC ON); B/W 0 lux @ IR ON
LENS TYPE	
Focal Length (Zoom Ratio)	2.8-12 mm
Max. Aperture Ratio	F No. 1.8(W) ~ 3.3(T)
Angular Field of View	Horizontal: 107-34°, Vertical: 55-19°, Diagonal: 134-38°
Min. Object Distance	0.2M-INF
Lens Type	Motorized(Ø14)
DORI	(2.8mm) D-56.0m, O-22.4m, R-11.2m, I-5.6m (12mm) D-240m, O-96.0m, R-48.0m, I-24.0m

OPERATIONAL	
IR Viewable Length	Up to 50m
Camera Title	On/Off
Day & Night	IR cut filter with auto switch (Day/Night/Auto/Image/Schedule)
Backlight Compensation	Off/On (5 Zone)
Wide Dynamic Range	True WDR
Digital Noise Reduction	3D DNR
Motion Detection	Off/On (8 Level)
Privacy Masking	Off/On (4 Zone, Rectangle)
Gain Control	Auto
White Balance	Auto / Manual
Electronic Shutter Speed	1/5 ~ 1/20000s
On-Board Storage	Micro SD slot, up to 256GB
Alarm	1 input, 1 output
Audio	1 input (RCA), 1 output (RCA)
Hardware Reset	Yes
Smart Feature	Face Detection (FD), Human & Vehicle Detection (PD & VD), Perimeter Intrusion Detection (PID), Line Crossing Detection (LCD), Cross Counting (CC), Stationary Object Detection (SOD), Heat Map (HM), Crowd Density Detection (CD), Queue Length Detection (QD), Rare Sound Detection (RSD)


NETWORK	
Ethernet	RJ45(10/100BASE-T)
Video Compression Format	H.265+/H.265/H.264
Resolution	<b>Main stream@30fps</b> 5MP (2880x1620), 4MP (2560x1440), 3MP (2304x1296), 1080P (1920x1080), 720P (1280x720) <b>Sub stream@30fps</b> 720P (1280x720), VGA (640x480), QVGA (320x240) <b>Third stream@30fps</b> VGA (640x480), QVGA (320x240)
Video Quality Adjustment	256Kbps ~ 8Mbps
Bitrate control method	CBR/VBR
Streaming Capability	Triple-Stream(Main/Sub/Third)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, IPv4, IPv6, UDP, SSL/TLS, PPPoE, SNMP, SFTP
Web browser	IE10/11, Safari V12.1 above, Firefox V.52 above, Google chrome V.57 above, Edge V.79 above
Security	IP address filter; complicated password; Authenticated username and password
Streaming Method	Unicast/Multicast
Application Programming Interface	ONVIF( Profile S/G/T)

ELECTRICAL	
Input Voltage / Current	D12V/POE(IEEE802.3af)
Power Consumption (IR OFF)	3W-4W
(IR ON)	7W-9W

MECHANICAL	
Material	Metal
Dimensions (HxWxD)	242*87.4*83.88mm
Weight	811g

ENVIRONMENTAL	
Operating Conditions	-35~+60°C/less than ≤ 95% RH
Ingress Protection	IP 67
Certificate	CE,FCC,ROHS,BIS,ISO 9001

## DIMENSION

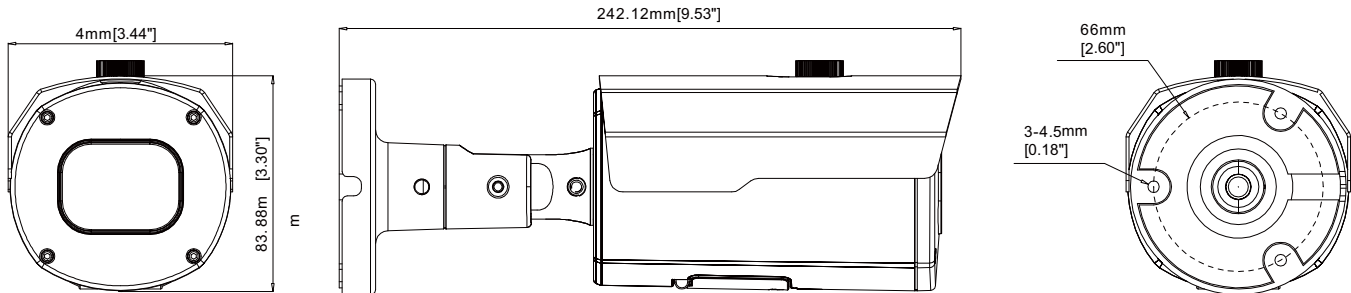

**For more information,**  
[www.Logixsafety.in](http://www.Logixsafety.in)  
 Call: +91-9971473554  
 Email: [logixsafety@gmail.com](mailto:logixsafety@gmail.com)

**LOGIX SAFETY ENGINEER**  
 Vatika tower Golf course road  
 Sector 54, Gurugram, Haryana 122011

